


Tank contents gauges with mounting kit for plastic battery type tanks

01

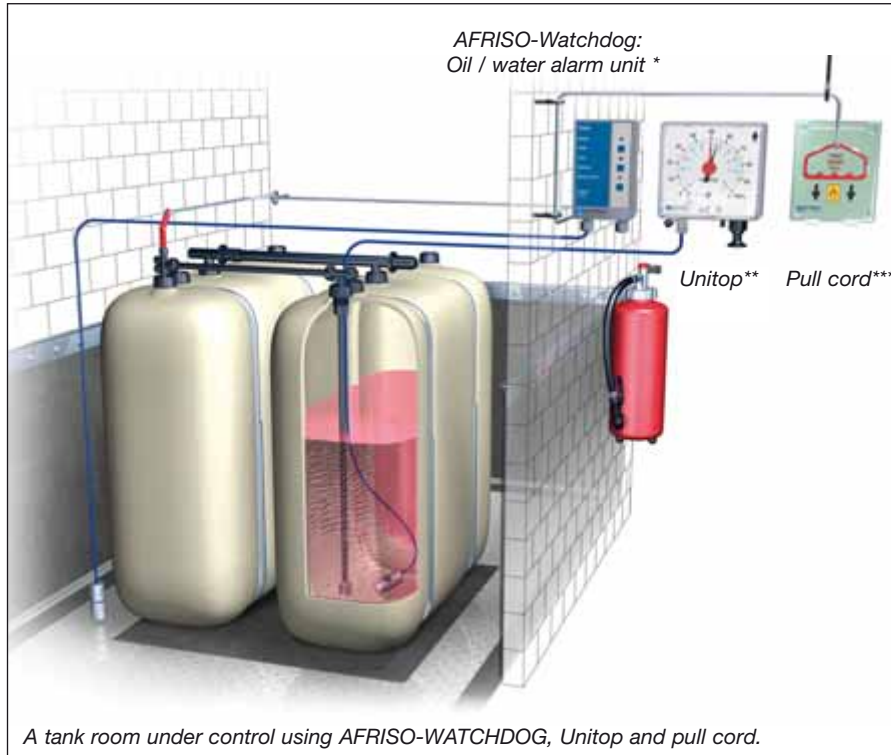

This mounting set enables quick and easy retrofitting of plastic battery type tanks without interruption of regular operation.

- Instant installation – no problem!
 1. Drill a hole into the flange
 2. Install the capillary tube
 3. Check the level

Benefits:

No components need to be dismantled for installation. Oil carrying pipes do not need to be dismantled and then recommissioned and de-aerated.

Many plastic fuel tanks become opaque over the years due to sediments, dirt and age. Often there is no spare connection available for a gauge. This special mounting kit makes it possible to connect a pneumatic remote reading contents gauge. There is no need to switch off the burner.

Many withdrawal systems already have corresponding markings on the mounting flanges for the drilling of holes.

Attention:

In most cases, it is prohibited to drill through the tank wall. This may render the warranty for the tank null and void.

Unitel-Set

This universal, pneumatic tank contents gauge for remote indication up to 50 m comes with a mounting kit for installation on plastic battery tanks. Accuracy of measurement $\pm 3\%$ FSD. The unit is fully adjustable for tank heights from 900 to 3,000 mm for fuel oil EL or diesel (density = 0.84 g/cm³). Reference pointer for easy consumption control. Indication in percentage of level. The mounting kit consist of the capillary tube 2.10 m with balance chamber (\varnothing 9 mm), self-sealing tank adaptor for a 10 mm hole, 10 m capillary tube, hose clips, steel nails and a capillary extension piece.

Unitop-Set

This universal, pneumatic tank contents gauge for remote indication up to 50 m comes with a mounting kit for installation on plastic battery tanks. Accuracy of measurement $\pm 2\%$ FSD. The unit is fully adjustable for tank heights from 900 to 3,000 mm for fuel oil EL or diesel (density = 0.84 g/cm³). Reference pointer and date indicator for easy consumption control. Indication in percentage of level. Litre scales are available (a request card is included with the kit). The mounting kit is identical to the Unitel kit.

* Refer to page 91 for an oil/water alarm unit
 ** Refer to page 16 for Unitop
 *** Refer to page 114 for a pull cord

DG: G	PU	Part no.	Price €
Unitel-Set	10	72512	
Unitop-Set	5	28004	