


Liquid barrier and condensate bar for vacuum type leak detectors

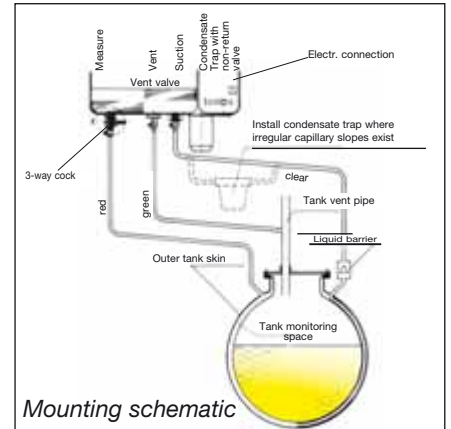

Liquid barrier

For the protection of vacuum leak detectors used on double-skinned tanks to prevent the ingress of liquid into the instrument.

Description

Liquid barrier used in conjunction with a condensate trap for visual control, complete with fixing bracket for simple mounting onto man-hole cover. The liquid barrier is mounted directly into the suction line between the leak detector and the double-skinned tank. The liquid carried in the suction line (condensate or, in the event of a leakage, the medium or ground water) is collected in the condensate trap of the liquid barrier. An integrated float closes off the suction line if too much liquid is present in the liquid barrier. To empty the condensate trap, the cup of the condensate trap is simply and quickly unscrewed.

Tested for tightness according to EN 13160-2.

Technical specifications

Hose connection

Interchangeable 4 or 6 mm in diam.

Housing

Plastic

Scope of delivery

Liquid barrier with condensate trap, fixing bracket, hose connector 4/6 mm diam.

Condensate bar

For the protection of leak detectors used on double-skinned tanks to prevent ingress of condensate liquid into the instrument or the system.

Description

Condensate bar with three condensate traps for visual control and with integrated bracket for simple wall mounting. The condensate bar is installed at the lowest point of the measurement, vent and suction lines just in front of the vacuum leak detector.

When condensate forms, the liquid is collected in the relevant condensate trap. To empty the condensate trap, the cup of the condensate trap is simply and quickly unscrewed.

Tested for tightness according to EN 13160-2

Technical specifications

Hose connection

Interchangeable 4 or 6 mm in diam

Housing

Plastic

Scope of delivery

Condensate trap bar with 3 condensate traps

Advantages

- Condensate trap for visual control, easy to empty
- Compact and robust construction from high impact plastic
- Compatible with 4 or 6 mm I/D hoses
- Tested for tightness
- Fixing bracket for simple and quick mounting
- AFRISO Quality product – Made in Germany

DG: H; PU: 1	Part no.	Price €
Liquid barrier	43646	
Condensate bar	43692	